

Installation Instructions for 2" Metal Posts on Level Runs using 262 Series Kit



NOTE: Parts must be kept clean and free of debris before installation for best results.

Tools Required for Installation

- 5/32" Drill Bit
- 1/4" Drill Bit
- 29/64" Drill Bit
- 1/8" Hex Wrench
- 3/16" Hex Wrench
- 3" Combo Wrench
- RFXPL-KEY
- Cut Off Kit (mandrel)
- Cut Off Kit (wheel)

Cut-off Tool

Used to cut cable flush with the end of the Pull-Lock® fittings, and to cut excess threads off stud-type Receivers. Includes mandrel and two cut-off wheels.

Order **RFX-CUT-OFF KIT**




DRILL POSTS


Hole size for \varnothing 1/8" dia. cable installation.

Drill 5/32" hole clear through all intermediate posts.

On the Pull-Lock end post, drill 5/32" on the inside of the post and drill 29/64" on the outside of the post.

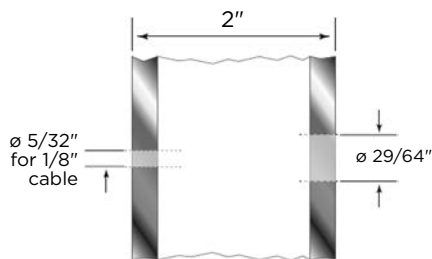

Drill 29/64" clear through Receiver end post only.




Note: Please contact us for drill size information when installing \varnothing 3/16" cable.




BEZDAN RAILING SOLUTIONS
Head Office: 4050 Graveley Street, Burnaby, BC V5C 4A5 Canada
Phone: 1 800 663 6356 Fax: 604 299 5464 Email: info@geobezdan.com
www.bezdancable.com

1. Install the tensioning end first with the 3-1/2" long Receiver.
2. Slip the Delrin® washer over the body of the Receiver and insert the Receiver into the post.

3. Start the threaded stud attached to the cable into the Receiver and turn 3 complete turns. This will thread about 1/2 of the stud into the Receiver.

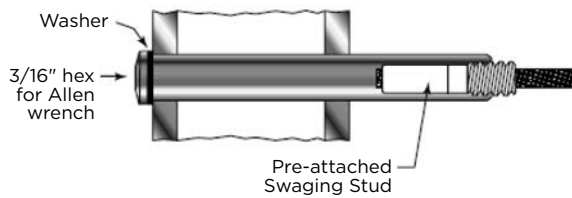


4. Run the bare end of the cable through all your intermediate posts and through the end post where you will be installing the Pull-Lock fitting.

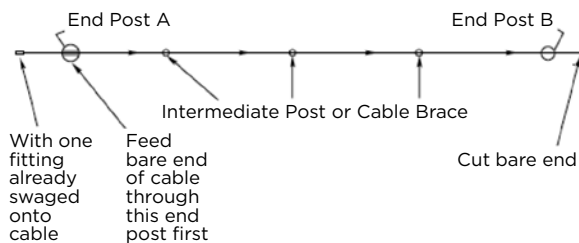


5. Slip the Delrin® washer over the body of the Pull-Lock fitting.




6. Push the cable into the hole in the front of the Pull-Lock fitting and pull the cable through. Twist the cable in the right hand direction as you push it into the fitting.

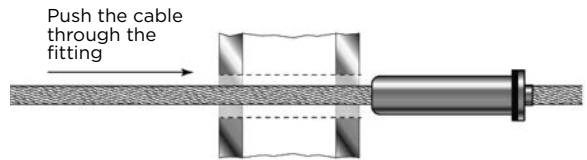


7. Push the Pull-Lock fitting along the cable and firmly into the hole in your post. Push it in as tightly as you can with your hand while pulling the cable through as tightly as you can.

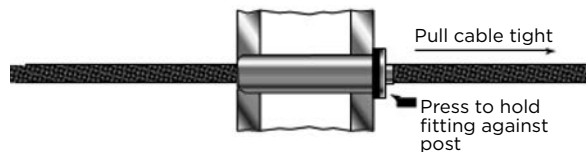


8. Cut the cable flush with the hole in the back of the fitting using a cut-off wheel.

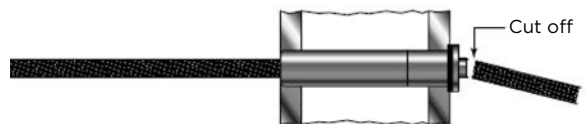

9. Press the cap onto the lip of the Pull-Lock fitting

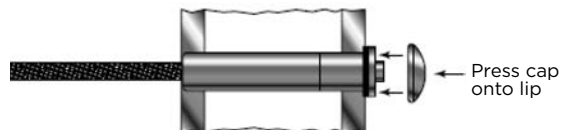

10. Go to the other end and tension the cable by holding the cable securely to prevent it from turning while you turn the Receiver with an Allen hex wrench. Be careful to protect the cable from damage while tensioning.

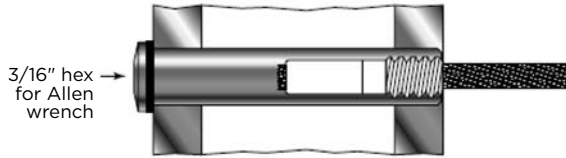

The swaging stud will be pulled into the Receiver by the tensioning

11. Tension in sequence, beginning with the outside cables and moving back and forth toward the center. Finished cables should be tensioned to have only 1/4" of play when finger-pulled.

