


Reference Guide

Post & Top Mount Bracket Combinations

Post and bracket options placed on the front, middle and back of tread to achieve a minimum guardrail height of 36" on a 7-7/8" rise and 10" run.

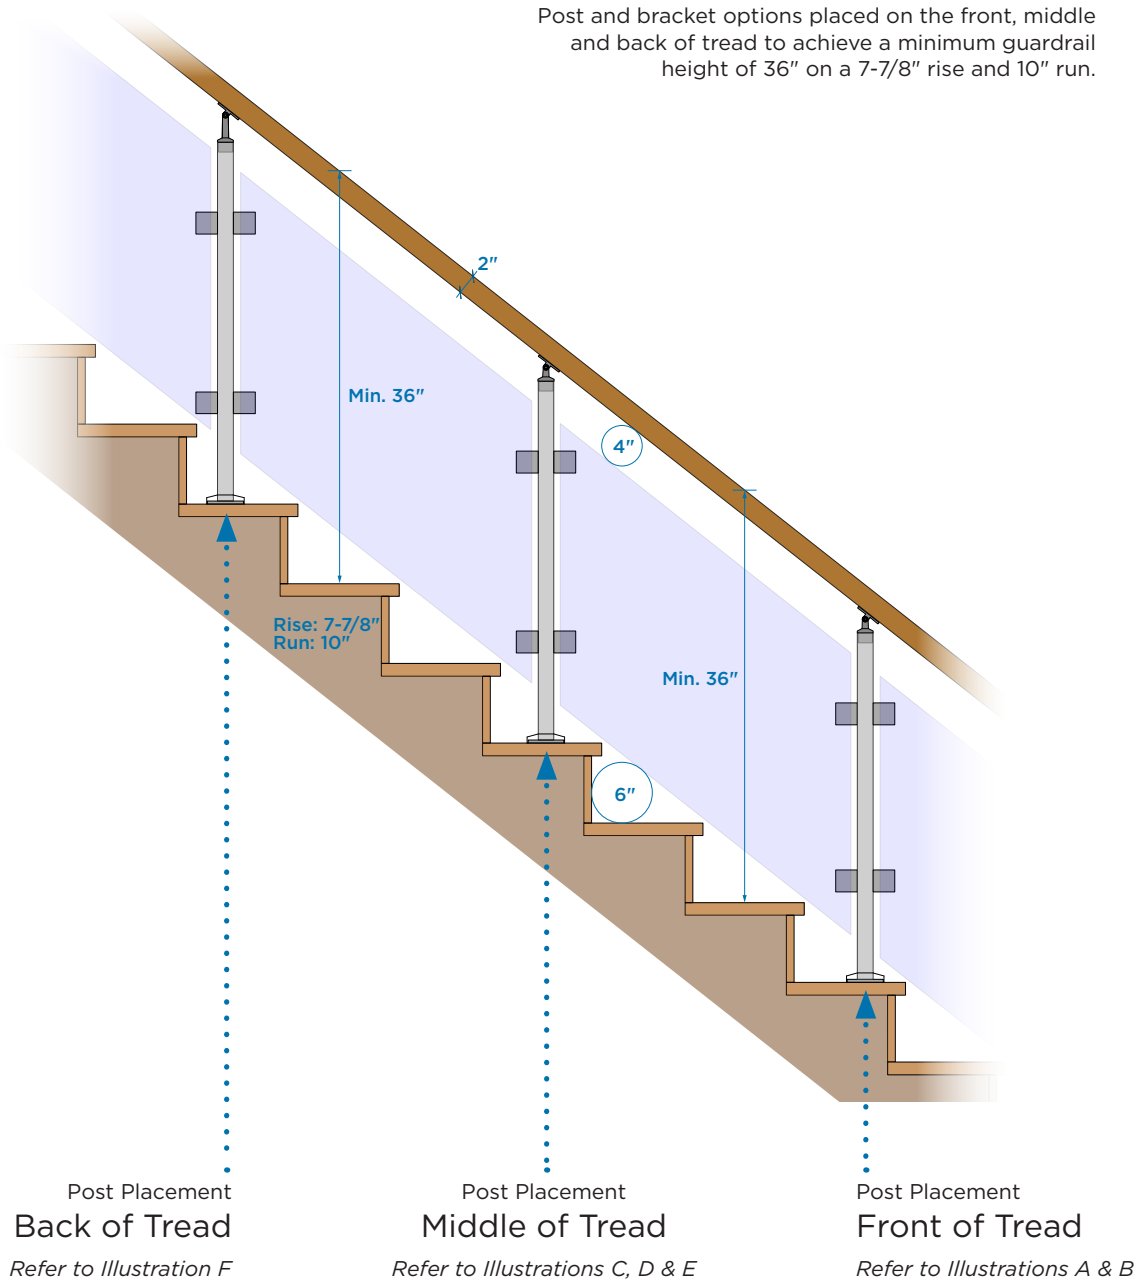


Bezdan Stainless pre-drilled and pre-assembled posts and top mount brackets provide a variety of off-the-shelf solutions for your projects. See the different post and bracket configurations on page 2.

Post & Top Mount Bracket Combinations


The product combinations and tread placements shown below achieve a minimum 36" guardrail height on a 7-7/8" rise and 10" run. Diagrams are for illustrative purposes only.

[Pre-drilled posts](#) can be paired with [various glass clip sizes and shapes](#) to suit design preferences, and the cover flange is optional. [Pre-assembled posts](#) include medium-sized glass clips to accommodate glass size from 6mm up to 12mm and a cover flange. Posts are available in round and square form with black stainless options.

Post Placement Front of Tread

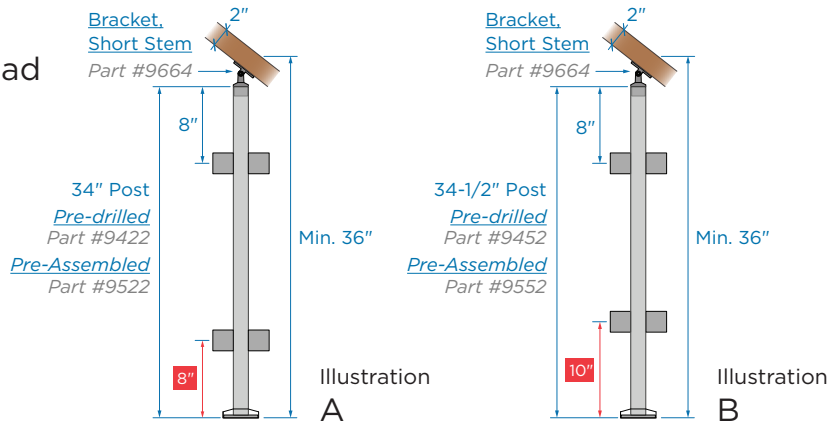

Post Placement Middle of Tread

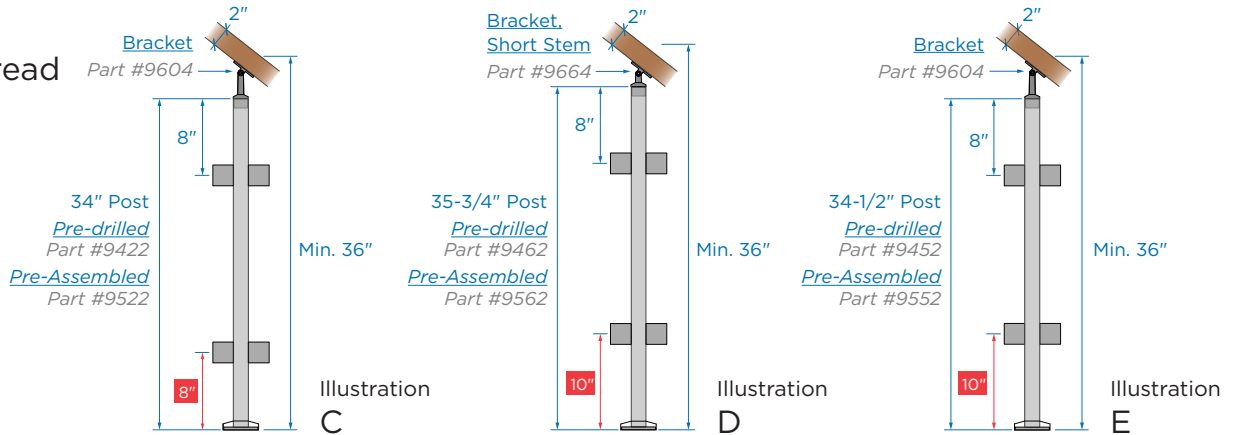

Post Placement Back of Tread

